

CUSTOMIZED CERAMIC TECHNOLOGIES FOR SPACE AND ASTRONOMY

High-performance ceramics

OUR STRENGTH-WIDE VARIETY OF CUSTOMIZED CERAMIC MATERIALS

Our cutting-edge technology is used around the world in multiple fields. Kyocera provides over 200 kinds of ceramics materials designed to meet the individual needs. High-performance ceramics are precisely engineered materials with unique properties that are not present in naturally occurring materials. These properties, such as electrical conductivity and heat resistance, allow them to stand up to conditions other materials cannot. In this way, our technical ceramics help make the impossible, possible.



ALUMINA

Alumina is the most widely used material among fine ceramics, and exists under two distinct structures: polycrystal (sintered alumina) or monocrystal (sapphire). Its applications are diverse due to its superb properties such as high insulation, high strength, high wear resistance and chemical resistance.



SILICON NITRIDE

Silicon nitride is a material with excellent specific strengths and very good thermal shock coefficient up to application temperatures of 1,100°C. The low thermal expansion in combination with high stiffness, strength and fracture toughness qualifies the material especially for applications where abrasion and thermal shock are major problems. Typical applications are lightweight fixtures and turbine components.



SILICON CARBIDE

Silicon carbide retains its strength at elevated temperatures as high as 1,400°C. In its sintered form (sintered SiC – SSiC) it features high corrosion resistance. As silicon-infiltrated SiC – SiSiC, high precision parts with fine detailed, hollow and complex structures can be manufactured. Applications include frames and structures for temperature controlled mirrors and observation optics.



ZIRCONIA


Zirconia offers high strength and toughness. Before zirconia, ceramics were considered impractical for scissors or knife applications. With its excellent properties, zirconia is also used for engineering applications such as pumps.



SPECIAL CERAMICS

Our portfolio also includes other ceramics such as aluminium nitride, aluminium titanate, single crystal sapphire, ferrites, dielectric ceramics and **special materials like fine cordierite**. Each of the materials has a customized application.


CERAMIC MATERIALS WITH OUTSTANDING PROPERTIES

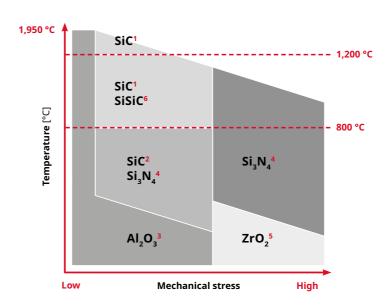

KEY PROPERTIES

- Extraordinary specific stiffness
- ▶ Temperature change resistance
- ▶ High-temperature resistance
- ¹ High strength and corrosion resistance at elevated temperatures
- ² High strength at temperatures < 800°C in vacuum or de-oxidation atmosphere
- ³ Versatile material that can be used in various
- temperature ranges

 ⁴ High strength and fracture toughness even at elevated temperatures
- ⁵ Good fracture toughness under high stresses
- ⁶ High rigidity and 0% shrinkage in sintering for precision parts

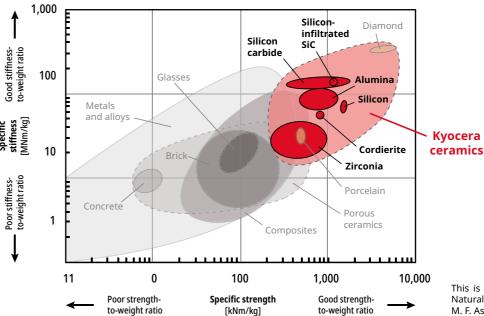


Ceramics chart shows compressive strength

This is an excerpt of "The Mechanical Properties of Natural Materials. I. Material Property Charts" M. F. Ashby, L. J. Gibson, U. Wegst and R. Olive Proceedings: Mathematical and Physical Sciences Vol. 450, No. 1938 (Jul. 8, 1995), pp. 123-140 (18 pages) Published by: Royal Society


VERTICAL INTEGRATED PRODUCTION

Kyocera is one of the few companies on the market that carries out all production steps itself. This vertical integration gives the company extensive control over technologies, quality and production.


Kyocera's wide variety of measurement and evaluation technologies and resources not only support the quality improvement of our ceramic parts, but also enhance customer products and R&D. Kyocera has strong problem-solving capabilities for a wide range of issues.

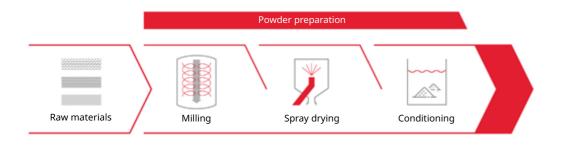





Vertically integrated production from raw material to the final product

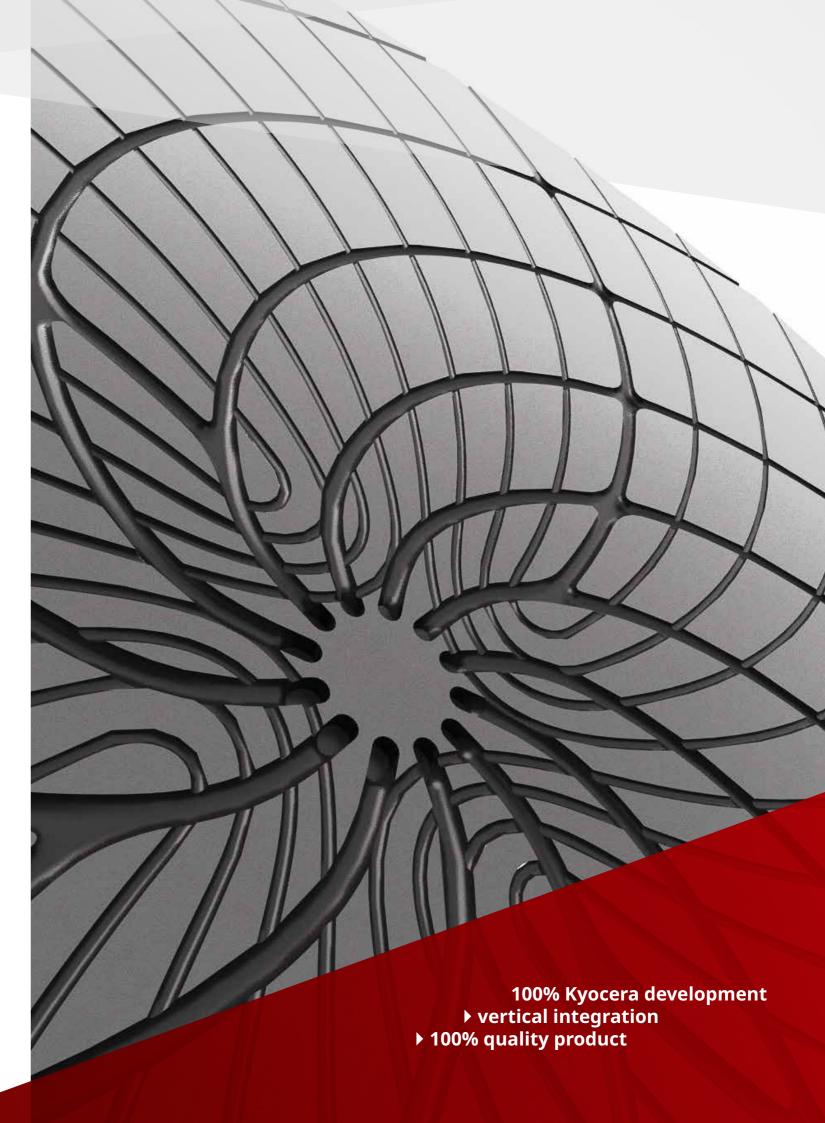

MATERIALS FOR SPACE & ASTRONOMY APPLICATIONS

FINE CORDIERITE (CO7200)

Fine Cordierite is an extremely low thermal expansion ceramic which was developed over two decades back, and we have been constantly improving on its characteristics since.


MATERIAL PROPERTIES


- Minimal temperature deformation due to unique material composition with an extremely low thermal expansion rate
- ▶ Approx. 70% weight reduction when compared to low CTE glass¹ with a slim ribbed, high rigidity design structure
- Fine Cordierite is **applicable for structural components** by its superior mechanical property










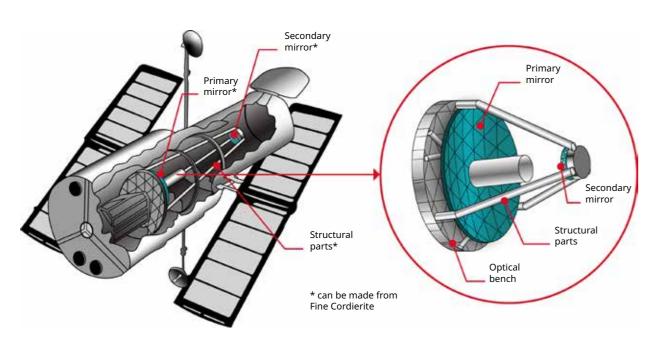

Structural parts made of ceramics in a satellite


TEMPERATURE DEPENDENCY GRAPH FINE CORDIERITE CO720

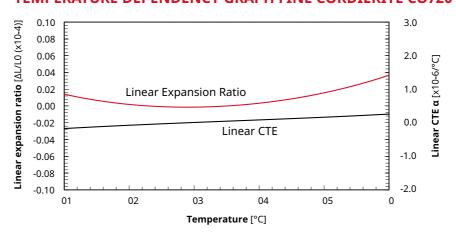

MATERIAL PROPERTIES COMPARISON WITH LOW CTE GLASS


| Properties | Unit | Low CTE glass | Fine Cordierite CO720 |
|-------------------|-------|---------------|--------------------------|
| Density | g/cm³ | 2.53 | 2.55 |
| CTE ² | ppm/K | 0.02 | 0.02 |
| Young's modulus | GPa | 90 | 144 |
| Specific rigidity | - | 36 | 56 |


3-POINT SUPPORTED DEFLECTION¹



Comparison conditions Product size: Ø 1,020 x 120 mm (rib structure) Supported points: outside 3 points

Load: self-weight





The values are typical material properties and may vary according to product configuration and manufacturing process.

¹ based on Kyocera's research

² temperature dependency graph

SILICON-INFILTRATED SILICON CARBIDE (SiSiC)

Proprietary joining and manufacturing technology for SiSiC enables complex, high precision components with unique design features:

- ▶ Hidden internal cavities possible (e.g. cooling channels)
- Complex and fine detailed structures below 1 mm achievable
- ▶ Large-scale parts monolithically up to 950 x 950 x 650 mm and larger via proprietary joining technologies
- ▶ High strength, extreme stiffness and reliability components at lowest weight
- Joining areas with identical material properties, such as Young's modulus and strength

MATERIAL PROPERTIES

- ▶ **Closed porosity** for water and gas tightness requirements
- Produced of ultra pure semiconductor grade material
- ▶ Extremely homogeneous material, even for largescaled parts

| | StarCeram® Si SiSiC | |
|-----|------------------------|--|
| SiC | min. 85 wt% | |
| Si | max. 15 wt% | |



Mirror with central metal connector and fusion bonding for internal cooling channels




Structural frame for measurement optic

SILICON CARBIDE (SSiC)

Excellent SSiC material properties enable applications up to 1600 °C requiring high mechanical and chemical resistance.

MATERIAL PROPERTIES

- ▶ Excellent chemical resistance from basic to acidic materials allowing applications in harsh environments
- Large-scaled parts with **outstanding hightemperature performance** answering the demanding needs of the aerospace industry



Extraordinary specific stiffness allows large structural components

| Properties | Unit | StarCeram [®] Si SSiC | StarCeram® Si SiSiC |
|------------------------------|-----------------------------------|-----------------------------------|------------------------|
| Density | g/cm³ | 3.13 | 3.05 |
| Fracture strength | MPa | 375 | 300 |
| Young's modulus | GPa | 395 | 380 |
| Thermal conductivity | W/mK | 125 | 200 |
| CTE (RT -1,000 °C) | x10 ⁻⁶ K ⁻¹ | 4.5 | 4.0 |
| Resistivity RT | Ωm | 104 | 10-2 |
| Thermal shock coefficient R1 | K | 180 | 190 |
| Max. working temperature | °C | 1,600 | 1,350 |

CHEMICAL RESISTANCE



ALUMINA (Al₂O₃) AND ZIRCONIA (ZrO₂)

Kyocera's oxide ceramics display operational safety, reliability and long lifetime.

Brazed oxide ceramic-to-metal assemblies outreach the excellent properties of ceramics and metal. Ceramics show electrical insulation; metal components feature weldability. This advantageous combination enables a wide range of vacuum, high-voltage and high-pressure applications.

MATERIAL PROPERTIES

- Mechanical strength
- ▶ High chemical resistance
- Good thermal shock resistance at high and low temperatures
- ▶ Good thermal conductivity
- ▶ Excellent electrical resistance
- ▶ Low dielectric loss at high frequency



Pressure sensor for aerospace

| Properties | Unit | Alumina F99.7 α-Al ₂ O ₃ | Zirconia FZM ZrO ₂ , MgO |
|--------------------------|-------|---|--|
| Purity | wt-% | > 99.7 | > 99.7 |
| Density | g/cm³ | ≥ 3.9 | ≥ 5.7 |
| Bending strength | MPa | 350 | 500 |
| Max. working temperature | °C | 1,950 | 900 |



SPACE & ASTRONOMY APPLICATIONS

From extreme temperatures to cosmic rays, the unforgiving environment of space means most organic materials used here on earth are rendered useless for many critical applications. The solution for this problem: high-performance ceramics from Kyocera.

From ceramic tubes for oxygen sensors to battery insulators, telescope spacers, and satellite applications, components made of technical ceramics provide the reliability and performance needed for space-specific applications. We are proud to support the explorers unravelling the mysteries of the universe with cutting-edge solutions.

CAMERA LENS SPACER

Subaru Telescope is an 8.2-meter (320 inch) optical-infrared flagship telescope operated by the National Astronomical Observatory of Japan (NAOJ), located at the Mauna Kea Observatory on Hawaii.


In 2012, when NAOJ installed a new super wide angle camera "Hyper Suprime-Cam (HSC)" into the Subaru Telescope, there were two design requirements for adaptive optics. One was to make a larger lens aperture and the other was to make the lens lighter.

Kyocera's cordierite was chosen as the best material to achieve the two design requirements for the lens support. Cordierite's superior characteristics enabled a slim design with enough material strength and rigidity to support the lens structure as well as minimal deformation due to temperature fluctuations.

Subaru Telescope

on Hawaii equipped with

Kyocera's cordierite ceramics

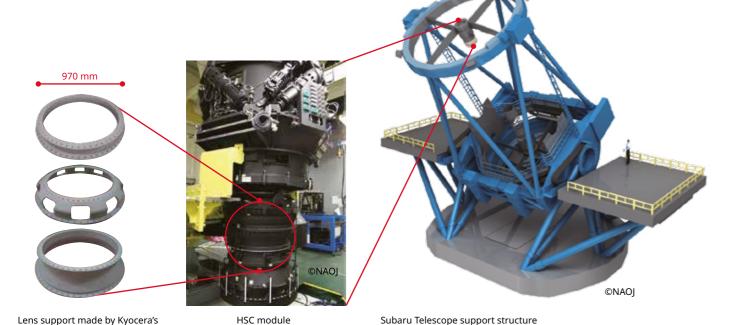

low CTE ceramic cordierite CO720

OPTICAL SYSTEMS INCLUDING MIRRORS


Kyocera has developed diffraction-limited off-axis reflective optical systems (mirrors, mirror holders, and optical benches) made entirely of cordierite materials, with Kyocera's high accuracy assembling technology.

Cordierite was used as it has a great "athermal property" whereby the optical performance does not degrade under varying temperature conditions owing to its monoclinic nature. We were able to process this extremely low thermal expansion ceramic to include cordierite mirrors coated with metal (Au), as seen in the pictures.


Alternatively, larger cordierite mirrors of over 1 meter diameter, can be produced with a light weight design and the required surface roughness.

Such structures are expected to be installed in large telescopes (30 meters) and space telescopes in the coming years.









Optical bench from different perspectives

CAMERA HOUSING MADE OF F99.7

In-house 5-axis CNC machining supported by ultrasonic processing allows the manufacture of complex components such as camera housing. The permeability of ceramics for electromagnetic radiation takes effect in this type of application: the electromagnetic waves of the sensors inside the housing can pass through to the outside, while radar beams from outside are hardly reflected thus impeding detection of aircraft.



Camera housing

INSULATORS FOR ION THRUSTERS

High electrical insulation and thermal strength of our F99.7 alumina material allow its use in components of ion thrusters. Excellent performance in ultra-high vacuum is guaranteed by minimal desorption and leakage rate. When required, we combine ceramics with metals.

CUSTOMIZED PARTS

Low weight and high corrosion resistance combined with high mechanical strength make our ceramic materials perfectly suitable for space applications. We excel in specific solutions. Our years of experience as a manufacturer of customized and standard components guarantee superior solutions to accomplish a variety of tasks.



Tubes, rods, capillaries for high temperature applications



Beam position monitor

ABOUT KYOCERA





The global Kyocera corporation - a strong partner.

▶ **Headquarters:** Kyoto, Japan

Foundation: 19

▶ **Employees:** over 80,000 worldwide

European headquarters: Esslingen, Germany

European

production sites:

Mannheim, Germany Selb, Germany Erfurt, Germany (further subsidiaries in

Europe)

KYOTO CERAMICS

KYOCERA – it all began with ceramics

KYOCERA Fineceramics Europe GmbH is a subsidiary of KYOCERA Europe GmbH, which has been successful in Europe for over 50 years. The Kyocera Group is one of the world's leading providers of high-performance ceramic components for the technology industry, offering over 200 different ceramic materials, as well as state-of-the-art technologies and services tailored to the specific needs of each market.

KYOCERA Fineceramics Europe GmbH has grown steadily in recent years – and is now a leading European supplier of customised solutions made of technical ceramics. Working in partnership, we develop and manufacture products that offer our customers added value in their respective markets and secure their technological lead in the long term. We are committed to this every day.

We have also been active in the field of environmental technology for 30 years. Our solutions for treatment of exhaust air and waste water from chemical laboratories and industrial processes are known worldwide under the FRIDURIT brand.

Throughout Europe, we are represented by three production and development sites in Mannheim, Selb and Erfurt, as well as six sales offices – in Mannheim, Selb, Esslingen, Neuss, Rungis (France) and Frimley (United Kingdom).

Our business partners benefit from the fact that we think and work across divisions within the Kyocera Group. Because innovations and real milestones can only be achieved together – across industries and national borders.

This is what we believe.

About the KYOCERA Group

KYOCERA Europe GmbH is a company of the KYOCERA Corporation headquartered in Kyoto/ Japan, a world leader in semiconductor, industrial and automotive components as well as electronic components, printing and multifunction systems, and communications technology. The technology group is one of the world's most experienced manufacturers of smart energy systems, with more than 45 years of industry expertise. The Kyocera Group comprises of around 300 subsidiaries.

Kyocera aims to create a better future for the world, using the power of technology to solve issues we face as a global society. This ambition is rooted in our Kyocera Management Rationale: to contribute to the advancement of society and humankind.

We will continue to work together with people around the world to solve issues critical to society leveraging all of the technologies and management capabilities we have accumulated during our 60-plus year history.

The company also takes an active interest in cultural affairs. The Kyoto Prize, a prominent international award, is presented each year by the Inamori Foundation established by Kyocera founder Dr Kazuo Inamori to individuals worldwide who have contributed significantly to the scientific, cultural, and spiritual betterment of humankind.









KYOCERA Fineceramics Europe GmbH

Steinzeugstrasse 92 68229 Mannheim / Germany Tel: +49 621 40547-300 E-mail: info@kyocera-fineceramics.de www.kyocera-fineceramics.de/en

Plant Selb

Lorenz-Hutschenreuther-Strasse 81 95100 Selb / Germany Tel: +49 9287 807-0

Plant Erfurt

Gustav-Tauschek-Strasse 2 99099 Erfurt / Germany Tel: +49 361 6008 5111

Sales office Esslingen

Fritz-Müller-Strasse 27 73730 Esslingen / Germany Tel: +49 711 93 93 4-0

Sales office Neuss

Hammfelddamm 6 41460 Neuss / Germany Tel: +49 2131 16 37-0

Sales office Great Britain

Prospect House, Archipelago, Lyon Way Frimley, Surrey GU16 7ER / Great Britain Tel: +44 1276-69 34 50

Sales office France

Parc Icade Orly - Rungis 21 rue de Villeneuve 94150 Rungis / France Tel: +33 1 41-73 73 30